

Building Entrance Terminals (Indoor)



Premium Quality - Heavy Duty


1880B1-100



110

Features & Benefits

- 25 foot cable stub input and 110 connector output
- protects up to 100 lines, also available in 25 pair (1880B1-25) and 50 pair (1880B1-50) configuration
- built-in stand off bracket allows for easy distribution cable routing
- 26 AWG swivel stub serves as fuselink
- stackable to allow for future service expansion
- external ground connectors accept 6-14 AWG ground wire
- accommodates industry standard 5 pin protection modules
- designed to exceed the requirements set forth in Underwriters Laboratory's UL497

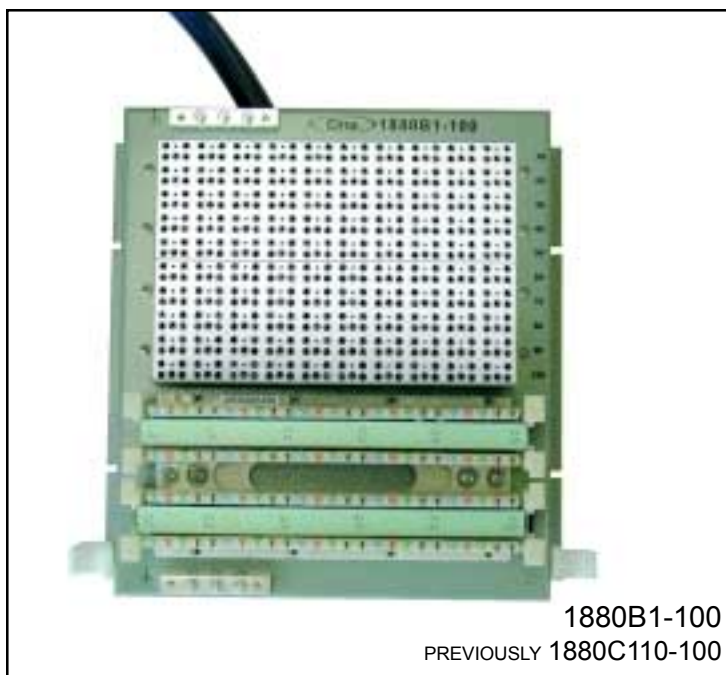

1880B1-100

PREVIOUSLY 1880C110-100

1880B1-100

Ordering Information

Model No.	Order No.	Pair Count	Input	Output	Dimensions (H" x W" x D")	Weight (lbs)
1880B1-100	326027C25	100	25 ft. 26 AWG shielded cable	110 connector	10.75 x 10.75 x 4.75	15

Note: Alternate cable lengths and gauges are available upon request.
Protection modules ordered separately.



Building Entrance Terminals (Indoor)

1880B1-100



110

