

Building Entrance Terminals (Indoor)

Premium Quality - Heavy Duty




1890ECT1-100



Features & Benefits

- 66 block input and output
- protects up to 100 lines, also available in 25 pair (1890ECT1-25) and 50 pair (1890ECT1-50) configuration
- double door locking lid system for restricted or separate access
- equipped with an internal fuse link
- also equipped with a removable splice chamber should the terminal fuse within a multiple configuration
- stackable to allow for future service expansion
- external ground connectors accept 6-14 AWG ground wire
- accommodates industry standard 5 pin protection module
- designed to exceed the requirements set forth in Underwriters Laboratory's UL497

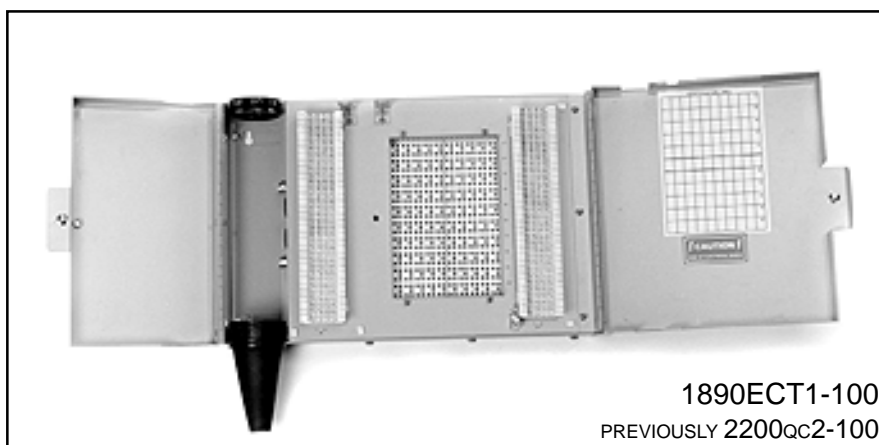

1890ECT1-100
PREVIOUSLY 2200QC2-100

1890ECT1-100

Ordering Information

Model No.	Order No.	Pair Count	Input	Output	Dimensions (H" x W" x D")	Weight (lbs)
1890ECT1-100	133030	100	66 block	66 block	11.75 x 19.0 x 4.7	27

Note: Protection modules ordered separately.



1890ECT1-100



Building Entrance Terminals (Indoor)

