

Building Entrance Terminals (Indoor)

Premium Quality - Heavy Duty




1890ECT1-25



Features & Benefits

- 66 block input and output
- protects up to 25 lines, also available in 50 pair (1890ECT1-50) and 100 pair (1890ECT1-100) configuration
- double door locking lid system for restricted or separate access
- equipped with an internal fuse link
- also equipped with a removable splice chamber should the terminal fuse within a multiple configuration
- stackable to allow for future service expansion
- external ground connectors accept 6-14 AWG ground wire
- accommodates industry standard 5 pin protection module
- designed to exceed the requirements set forth in Underwriters Laboratory's UL497

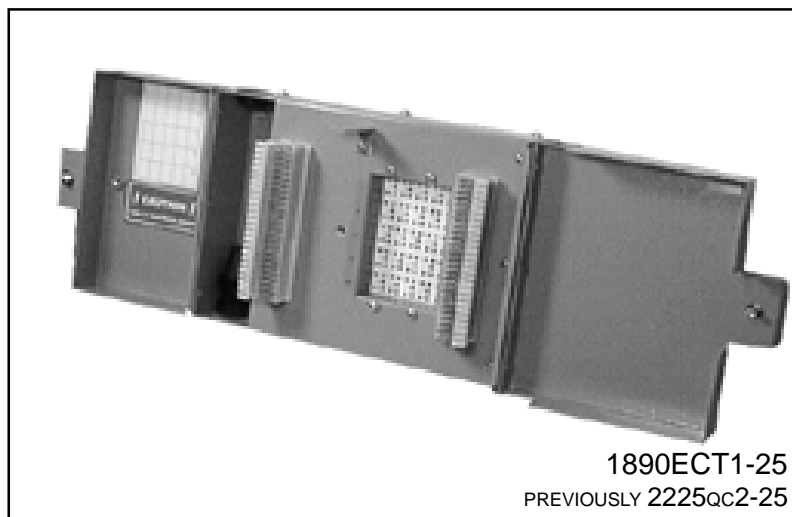

1890ECT1-25
PREVIOUSLY 2225QC2-25

1890ECT1-25 Ordering Information

| Model No. | Order No. | Pair Count | Input | Output | Dimensions (H" x W" x D") | Weight (lbs) |
|-------------|-----------|------------|----------|----------|---------------------------|--------------|
| 1890ECT1-25 | 107005 | 25 | 66 block | 66 block | 9.5 x 16.5 x 5 | 8 |

Note: Protection modules ordered separately.



1890ECT1-25



Building Entrance Terminals (Indoor)

