


Clarity 6 Shielded TracJack, T568A/B, 180 degree - OR-TJS600



Clarity 6 Shielded,TracJack, ETL verified to TIA Category 6 component specification. Front-loading and front removable. New universal T568A/B wiring label and tapered wiring towers simplify termination. Center tuned to Clarity 6 Shielded patch cords for optimum performance.

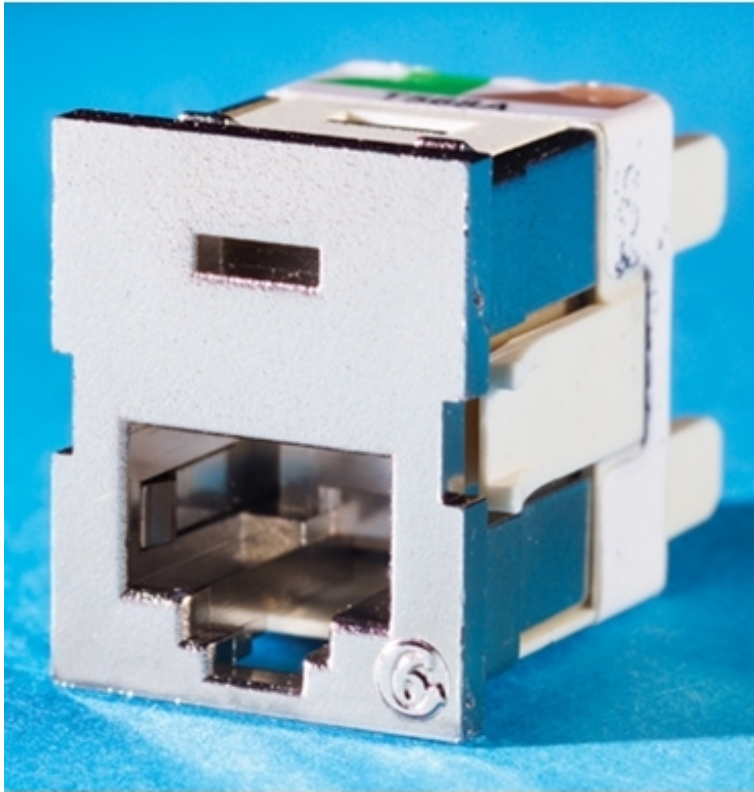

FEATURES

- **ETL Verified to Category 6 component standard:** Ensures standards compliance.
- **Center tuned design:** Transparent interface with Clarity 6 cords.
- **Easy lace IDC housing:** Reduces wiring time.
- **Easy to follow universal wiring label:** Quick and user-friendly, eliminates confusion.
- **Standard TracJack footprint:** Fits in all TracJack faceplates and housings.
- **Front removable:** Less intrusive access for adds, moves, changes.
- **Icon compatible, C6 Marking on jack face:** Supports 606 designation requirements.

Specifications

DIMENSION INFO

Height Metric: 23.37 mm

Width Metric: 18.54 mm

Depth Metric: 38.86 mm

Height U S: .92"

GENERAL INFO

Category Performance Application: Category 6/FTP Shielded

Color: Metalized Plastic

Footprint: TracJack

TECHNICAL INFO

Wire Gauge: 22-26 AWG

Category Rating: Category 6

CONSTRUCTION INFO

Component1: TracJack Outer Shield - Material1: Formed Copper Alloy, Finish_Plating1: Nickle plating 80 micro inches

Component3: Array of eight modular dual reactance Category 6 contacts - Material3: Beryllium copper, Finish_Plating3: Nickel plating and a minimum of 50 micro inches of selective gold plating in contact area

Component4: IDC contacts (Low noise) - Material4: Phosphor bronze, Finish_Plating4: Nickel plating with tin over plate

LISTING AGENCY INFO

ETL 3030592-034A

FCC

UL E131600

BUY AMERICAN ACT COMPLIANCE

Country of Origin: MEXICO

Buy American Act Status: Trade Agreement Act Compliant