Product Information Sheet


STANDARD RACK, 6" DEEP

Features 6" deep upright mounting channels for MDF, IDF and other high-capacity distribution frame applications. The additional rack depth provides extra room for high-density equipment and cable needs.

- High strength aluminum construction steel top angles on painted racks
- Supplied with (2) top angles for additional strength
- EIA-310-D Standard Universal 5/8"-5/8"-1/2" alternating hole pattern offers greater mounting flexibility and is fully compatible with conventional Wide 1 1/4"-1/2" alternating hole patterns
- RMU marks simplify equipment installation
- High-strength, roll-formed threaded mounting holes
- Ships unassembled and individually packaged
- Includes assembly hardware and (50) pilot point #12-24 mounting screws with combination Phillips/Straight heads
- Weight capacity 1000 lb (weight must be evenly distributed and rack must be properly secured to the floor)
- UL Listed

Part Number	Description	Shipping Weight
66353-X03	19"W x 7'H, 45 RMU	38 lb
66383-X03	23"W x 7'H, 45 RMU	42 lb
66363-X03	35"W x 7'H, 45 RMU	52 lb

X=color; 1=Gray, 2=White, 5=Clear, 7=Black

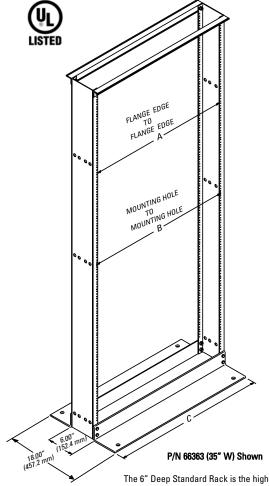

The 6" Deep Standard Rack is the high-capacity frame that is designed for use with cabling sections and is the basic frame around which the XLBET/MDF frames are developed.

Rack Dimensions				
Dimension	19" EIA Rack	23" EIA Rack	35" EIA Rack	
А	17.79" (451.9 mm)	21.79" (554.5 mm)	33.79" (858.3 mm)	
В	18.32" (465.2 mm)	22.32" (566.9 mm)	34.32" (871.7 mm)	
С	20.32" (516. mm)	24.32" (617.7 mm)	36.32" (922.5 mm)	