

## LANmark-2000 Enhanced Category 6 Riser

LANMARK-2000 is Berk-Tek's highest-performing Premium Category 6 cable. Every key electrical property has been improved when measured against the TIA/EIA-568-B.2-1 Category 6 standard for transmitted signals, making them stronger and less susceptible to outside interference. LANmark-2000 is a true multimedia cable and is specifically designed to handle voice, video and data simultaneously.

### Description

#### Construction

Bare copper wire insulated with Polyethylene. Two insulated conductors twisted together to form a pair and four such pairs laid up with crossfiller to form the basic unit jacketed with flame-retardant PVC.

#### Standards

- North America: ANSI/TIA/EIA-568-B.2-1 Category 6, UL444 and C22.2 No. 214-02
- International: ISO/IEC 11801-2nd Edition category 6, EU directive 2002/95/EC (RoHS)

#### Flame Rating

- Non-Plenum; UL 1666, CMR
- UL Listed


#### Applications

- IEEE 802.3      1000BASE-T      1 Gb/s
- TIA/EIA-854      1000BASE-TX      1 GB/s
- ATM              155 Mb/s          155 Mb/s
- IEEE 802.3      100BASE-TX      100 Mb/s
- CDDI              100 Mb/s
- IEEE 802.3      10BASE-T          10Mb/s
- IP Video
- Broadband Video

#### Features

- Full duplex operation capable over four cable pairs
- Increased usable bandwidth vs. the category 6 standard
- Documented balance characteristics (LCL/TCL, EL TCTL)
- Reduced attenuation (Insertion Loss)
- ETL verified to ANSI/TIA/EIA-568-B.2-1 Category 6 standard

#### Benefits

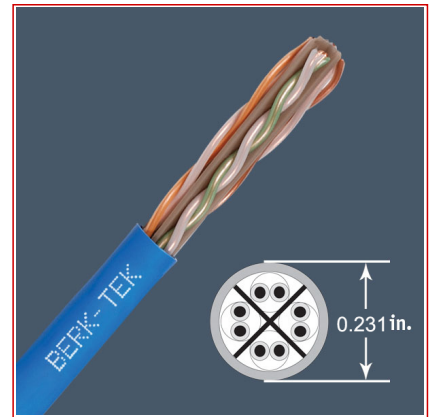

#### Standards

**National TIA/EIA-568-B.2**

## LANmark-2000 Enhanced Category 6 Riser

- Provides additional performance margin to reliably support Gigabit Ethernet in high-noise environments
- Provides bandwidth required for multimedia, broadband video analog video and other future applications
- Balance characteristics improve overall cable performance and reduce cable emissions which results in reduced transmission errors
- Reduced diameter allows for more efficient space utilization
- Characterized to 600 MHz, 350 MHz greater than the standard
- Improved ACR allows improved signal to reach the receiver resulting in cleaner data and video transmission

### Characteristics

Construction characteristics	
Type of cable	UTP
Dimensional characteristics	
Length per reel	1000.0 ft
Number of pairs	4
Usage characteristics	
Field of application	Indoor
Category	Cat. 6e
Fire safety	Riser Rated

### Product List

☎=Make to order, 📦=Make to stock

Part Number	Description	Colour	Packaging
📦 10167478	LANmark-2000 Enhanced Category 6 Riser	Light grey	Reel
📦 10167479	LANmark-2000 Enhanced Category 6 Riser	Light grey	Reel in a box
📦 10167480	LANmark-2000 Enhanced Category 6 Riser	White	Reel
📦 10167481	LANmark-2000 Enhanced Category 6 Riser	White	Reel in a box
📦 10170687	LANmark-2000 Enhanced Category 6 Riser	Green	Reel
📦 10170688	LANmark-2000 Enhanced Category 6 Riser	Green	Reel in a box
📦 10170689	LANmark-2000 Enhanced Category 6 Riser	Orange	Reel
📦 10170690	LANmark-2000 Enhanced Category 6 Riser	Orange	Reel in a box
📦 10167482	LANmark-2000 Enhanced Category 6 Riser	Yellow	Reel
📦 10167483	LANmark-2000 Enhanced Category 6 Riser	Yellow	Reel in a box
📦 10167476	LANmark-2000 Enhanced Category 6 Riser	Blue	Reel
📦 10167477	LANmark-2000 Enhanced Category 6 Riser	Blue	Reel in a box
📦 10170691	LANmark-2000 Enhanced Category 6 Riser	Violet	Reel
📦 10170692	LANmark-2000 Enhanced Category 6 Riser	Violet	Reel in a box
📦 10170693	LANmark-2000 Enhanced Category 6 Riser	Red	Reel
📦 10170694	LANmark-2000 Enhanced Category 6 Riser	Red	Reel in a box
📦 10189739	LANmark-2000 Enhanced Category 6 Riser	Black	Reel

☎ = Make to order, 📦 = Make to stock

## LANmark-2000 Enhanced Category 6 Riser

### Technical Data - Physical

Technical Data - Physical			Color Code		
			<b>Pair-1</b>	White/Blue	Blue
<b>Conductor</b>	23 AWG solid bare copper		<b>Pair-2</b>	White/Orange	Orange
<b>Conductor diameter—in. (mm)</b>	0.022	(0.56)	<b>Pair-3</b>	White/Green	Green
<b>Insulated conductor diameter</b>	0.039	(0.99)	<b>Pair-4</b>	White/Brown	Brown
<b>Cable diameter—in. (mm)</b>	0.231	(5.87)			
<b>Nominal cable weight—lb./kft. (kg/km)</b>	30	(41)	<b>Temperature Rating</b>		
<b>Max. installation tension—lb. (N)</b>	25	(110)	<b>Installation</b>	0°C to +50°C	
<b>Min. bend radius—in. (mm)</b>	1	(25.4)	<b>Operation</b>	-20°C to +75°C	

### Technical Data - Parametrics

<b>Mutual Capacitance</b>	5.6 nF/100m max.
<b>DC resistance max.</b>	9.38 Ohms/100 m max.
<b>Skew</b>	35 ns/100 m nom. 45 ns/100 m max
<b>Pair to ground Unbalance</b>	330 pF/100 m max. at 1 kHz
<b>Velocity of Propagation</b>	69% nom. non-plenum
<b>Input Impedance</b>	100 ± 13% 0.772-100 MHz, 100 ± [13+15log (F/100)] 100-500 MHz
<b>DC Resistance Unbalance</b>	3% max.

### Technical Data - Electrical

FREQ (MHz)	SRL (dB)		RL (dB)		INSERTION LOSS (dB/100m)		PS-NEXT (dB)		NEXT (dB)		ACR (dB/100m)	
	min.	typical	min.	typical	max.	typical	min.	typical	min.	typical	min.	typical
1	na	44.0	20.0	36.8	2.0	1.7	82.3	101.8	84.3	107.8	82.3	102.7
4	na	46.6	23.6	34.5	3.7	3.5	73.3	88.9	75.3	97.6	71.6	87.2
10	26.0	47.8	26.0	38.3	5.8	5.6	67.3	82.6	69.3	89.4	63.5	79.3
16	26.0	44.5	26.0	36.8	7.4	7.2	64.3	79.7	66.3	86.5	58.9	75.3
20	26.0	45.1	26.0	38.9	8.2	8.1	62.5	77.5	64.5	86.8	56.3	71.0
31.25	25.1	53.4	25.1	39.3	10.4	10.1	59.9	74.9	61.9	81.9	51.6	66.4
62.5	23.5	41.0	23.5	39.0	15.0	14.6	55.4	68.4	57.4	74.8	42.4	56.2
100	22.5	43.0	22.5	36.4	19.3	18.7	52.3	65.0	54.3	78.1	35.1	47.4
250	20.5	38.4	20.5	34.8	32.0	30.7	46.3	63.3	48.3	69.2	16.4	35.6
350	19.8	37.8	19.8	41.2	38.7	36.9	44.2	61.0	46.2	67.4	7.6	26.5
500	19.0	35.4	19.0	33.6	47.6	45.1	41.8	51.4	43.8	60.7	—	7.2
600	18.6	33.9	18.6	33.4	53.0	49.8	40.6	50.3	42.6	56.0	—	2.0

Electrical characteristics are guaranteed to 500 MHz. Data above 500 MHz is for engineering information

## LANmark-2000 Enhanced Category 6 Riser

### Technical data - Electrical

FREQ (MHz)	PS-ACR (dB@100m)		ELFEXT (dB)		PS-ELFEXT (dB)		LCL/TCL (dB@100m)	EL TCTL (dB@100m)
	min.	typical	min.	typical	Min.	typical	min.	min.
1	80.3	100.1	76.8	100.7	73.8	92.1	50.0	35.0
4	69.6	85.5	64.7	92	61.7	81.8	44.0	23.0
10	61.5	77.1	56.8	80.9	53.8	73.3	40.0	15.0
16	56.9	72.7	52.7	76.3	49.7	69.5	38.0	10.9
20	54.6	69.6	50.7	74.5	47.7	67.6	37.0	9.0
31.25	49.5	65	46.9	70	43.9	63.8	35.1	5.5
62.5	40.4	54.2	40.8	59.6	37.8	54.9	32.0	—
100	33.0	46.7	36.8	62.1	33.8	52.8	30.0	—
250	14.4	33.1	28.8	52.7	25.8	46.5	26.0	—
350	5.4	24.5	25.9	45.6	22.9	37.3	24.6	—
500	—	6.2	22.8	40.3	19.8	34.1	23.0	—
600	—	-0.2	—	37.1	—	29.7	22.2	—

### Selling delivery information

PLEASE NOTE: In the interest of product improvement, Berk-Tek, a Nexans company may make improvements or changes in the products, the programs or services described at any time without notice. Additionally, the information contained herein may include typographical errors or technical inaccuracies. Changes will be periodically made to address any such issues.